



## VIBRATION RANGE

# VET/VEM

## External vibrators



**+**  
**Adjustable  
force**

The different models and the eccentric regulation allow adjustment to a wide range of needs.

**+**  
**IP65  
Protection**

Hermetic housing that protects the equipment against external agents such as dust and rain


**+**  
**Resistant**

Long life high-strength aluminum housing, that performs in adverse working conditions.

**+**  
**Quick coupling**

Optional clamps compatible with different formworks, saving time in assembly and operation.

- » The clamp counts with a safety strap
- » Compatible with different types of formworks
- » Clamps are available for VET/VEM 100, 150 and 300 models
- » For all kinds of uses: Precast, formwork, hoppers, tables, belts and vibrating screens...

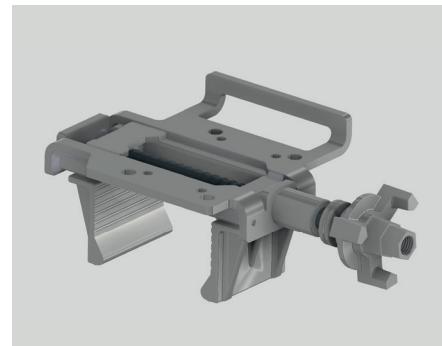

### Technical Data

MODEL	Weight (kg)	Centrifugal force (kg)	Rated current (A)	Oscillations (r.p.m.)	Dimensions CxDxE (mm)	Fixing dimensions AxB (mm)	Cord (m)	Connection	Diameter Ø G (mm)
VET 100	5.1	99	0.2	3000	231x131x159	62-74x106	2	400 V3 ~ 50Hz	9
VET 150	7.3	197	0.35	3000	231x131x159	62-74x106	1	400 V3 ~ 50Hz	9
VET 300	10.5	311	0.52	3000	273x155x175	90x125	1	400 V3 ~ 50Hz	13
VET 600	16.3	516	0.96	3000	362x208x210	120x170	1	400 V3 ~ 50Hz	17
VET 800	21.1	788	1.45	3000	362x208x210	120x170	1	400 V3 ~ 50Hz	17
VET 1600	52.6	1571	2.94	3000	421x229x262	140x190	1	400 V3 ~ 50Hz	17
VEM 100	6.5	99	0.5	3000	231x131x159	62-74x106	2	230 V1 ~ 50Hz	9
VEM 150	7.3	197	1.1	3000	231x131x159	62-74x106	1	230 V1 ~ 50Hz	9
VEM 300	10.5	311	1.15	3000	273x155x177	90x125	1	230 V1 ~ 50Hz	13